

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 23 MAR 2001

WFO

PCT

Applicant's or agent's file reference P 00-449/AE	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/SE00/00416	International filing date (day/month/year) 02.03.2000	Priority date (day/month/year) 04.03.1999
International Patent Classification (IPC) or national classification and IPC ₇ A46B 7/10		
Applicant SIB Svenska Industri Borstar i Västerås AB et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 4 sheets, including this cover sheet.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 18.09.2000	Date of completion of this report 09.02.2001
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Åke Olofsson / JA A Telephone No. 08-782 25 00

Form PCT/IPEA/409 (cover sheet) (January 1998)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE0000416

1. Basis of the report

1. With regard to the **elements** of the international application:*

- ☒ the international application as originally filed
- ☐ the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the claims:
pages _____, as originally filed
pages _____, as amended (together with any statement) under article 19
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the drawings:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the sequence listing part of the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.These elements were available or furnished to this Authority in the following language english which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☒ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheet/fig _____

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

** Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/00416

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Claims	<u>1-12</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-12</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-12</u>	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)

The present invention relates to a method for mounting a drum as well as a drum and an axle for a brush roller. The drum is preferably made from four segments of extruded aluminium sections. In a first step each segment is arranged so that edge portion of the first shoulder and/or the edge portion of the second shoulder are in contact with the second or first contact surface, respectively, of an adjacent segment. This ensures that the drum will always have the same diameter. When the drum is mounted on the axle, a circular plate with a concentrically arranged shaft end is fitted on the end portions of the drum.

The segments incorporated in a drum exhibit the following characteristics. The segments consists of extruded aluminium sections. A segment exhibits an outer are form. Each aluminium sections provided on its upper side with two or more, preferably four, radically protruding beams. A U-shaped channel is formed between two adjacent beams. Each segment has a first shoulder and a second shoulder. The segment are also made double-walled, one ore more cavities being formed in each segment.

The invention also relates to an axle for a brush roller. The axle consisting of a drum as describe above. The axle is arranged between two shaft ends, each shaft end being connected to a torque-transmitting plate arranged concentrically in relation to and connected to the end part of the drum.

.../...

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/00416

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V.

None of the documents cited in the International Search Report, or any combination of them, can be considered to anticipate the invention as defined in claims 1-12. The cited documents describe only general state of the art, which is not considered to be particularly relevant for the invention.

Therefore, the claims are considered to meet the criteria of novelty, inventive step and industrial applicability.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00416

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A46B 7/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A46B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data bases consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3134123 A (B.E. NELSON), 26 May 1964 (26.05.64)	1-12
	--	
A	US 3533125 A (J.A. BUECHEL ET AL), 13 October 1970 (13.10.70)	1-12
	--	
A	US 3862463 A (R.C. REITER), 28 January 1975 (28.01.75)	1-12

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents

- * "A" documents defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" documents which may throw doubt on priority claim(s) in which is cited to establish the publication date of another extension or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to demonstrate the principle or theory underlying the invention

* "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

* "Z" document member of the same patent family

Date of the actual completion of the international search

19 June 2000

Date of mailing of the international search report

06-07-2000

Name and mailing address of the ISA:

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Ake Olofsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on parent family members

02/12/99

International application No.

PCT/SE 00/00416

Patent document cited in search report	Publication date	Parent family member(s)	Publication date
US 3134123 A	26/05/64	NONE	
US 3533125 A	13/10/70	NONE	
US 3862463 A	28/01/75	NONE	

PATENT COOPERATION TREATY

PCT

COPY

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference P 00-449/AE	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/SE00/00416	International filing date (day/month/year) 02.03.2000	Priority date (day/month/year) 04.03.1999
International Patent Classification (IPC) or national classification and IPC: A46B 1/20		
Applicant: SIB Svenska Industri Borstar i Vasterås AB et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 4 sheets, including this cover sheet.
- ☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 10.09.2000	Date of completion of this report 09.02.2001
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Åke Olofsson / JA A Telephone No. 08-782 25 00

Form PCT/IPEA/409 (cover sheet) (January 1998)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE0000416

I. Basis of the report

1. With regard to the elements of the international application:*

- ☒ the international application as originally filed
- ☐ the description:
 pages _____, as originally filed
 pages _____, filed with the demand
 pages _____, filed with the letter of _____
- ☐ the claims:
 pages _____, as originally filed
 pages _____, as amended (together with any statement) under article 19
 pages _____, filed with the demand
 pages _____, filed with the letter of _____
- ☐ the drawings:
 pages _____, as originally filed
 pages _____, filed with the demand
 pages _____, filed with the letter of _____
- ☐ the sequence listing part of the description:
 pages _____, as originally filed
 pages _____, filed with the demand
 pages _____, filed with the letter of _____

2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this form.

These elements were available or furnished to this Authority in the following language english which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☒ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheet/fig _____

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

** Any replacement sheet containing such amendments must be referred to under item I and annexed to this report

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/00416

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability: citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	<u>1-12</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-12</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-12</u>	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)

The present invention relates to a method for mounting a drum as well as a drum and an axle for a brush roller. The drum is preferably made from four segments of extruded aluminium sections. In a first step each segment is arranged so that edge portion of the first shoulder and/or the edge portion of the second shoulder are in contact with the second or first contact surface, respectively, of an adjacent segment. This ensures that the drum will always have the same diameter. When the drum is mounted on the axle, a circular plate with a concentrically arranged shaft end is fitted on the end portions of the drum.

The segments incorporated in a drum exhibit the following characteristics. The segments consists of extruded aluminium sections. A segment exhibits an outer are form. Each aluminium sections provided on its upper side with two or more, preferably four, radially protruding beams. A U-shaped channel is formed between two adjacent beams. Each segment has a first shoulder and a second shoulder. The segment are also made double-walled, one ore more cavities being formed in each segment.

The invention also relates to an axle for a brush roller. The axle consisting of a drum as describe above. The axle is arranged between two shaft ends, each shaft end being connected to a torque-transmitting plate arranged concentrically in relation to and connected to the end part of the drum.

.../...

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/00416

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V.

None of the documents cited in the International Search Report, or any combination of them, can be considered to anticipate the invention as defined in claims 1-12. The cited documents describe only general state of the art, which is not considered to be of particular relevance for the invention.

Therefore, the claims are considered to meet the criteria of novelty, inventive step and industrial applicability.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

A46B 7/10

A1

(11) International Publication Number:

WO 00/51461

(43) International Publication Date:

8 September 2000 (08.09.00)

(21) International Application Number: PCT/SE00/00416

(22) International Filing Date: 2 March 2000 (02.03.00)

(30) Priority Data:

9900789-0

4 March 1999 (04.03.99)

SE

(71) Applicant (for all designated States except US): SIB SVENSKA INDUSTRI BORSTAR I VÄSTERÅS AB [SE/SE]; Ödhumlegatan 4, S-723 55 Västerås (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): EKHOLM, Hans [SE/SE]; Jakthundsgatan 103, S-722 46 Västerås (SE).

(74) Agents: KARLSSON, Leif et al.; L.A. Groth & CO. KB, Box 6107, S-102 32 Stockholm (SE).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

In English translation (filed in Swedish).

(54) Title: METHOD FOR MOUNTING A DRUM AS WELL AS A DRUM AND AN AXLE FOR A BRUSH ROLLER

(57) Abstract

A method for assembling a drum (2) built up of segments and forming part of the axle (1) for a brush roller wherein: a) each segment (7.1, ..., 7.4) is brought into alignment by the edge portion (42, 43, respectively) of a first shoulder (35) and/or a second shoulder (36) being brought into contact with the second (41) or first (40) contact surface of an adjacent segment (7.1, ..., 7.4); b) through-holes (45, 46) are drilled in radial direction through a first (35) and a second shoulder (36) in each segment (7.1, ..., 7.4), one of said holes also being threaded; c) two (45, 46) or more holes (45, 46) are drilled in axial direction in each shoulder at equal or different distances from each other; d) an attachment element (47) is arranged at each hole (45, 46). The invention also relates to a drum (2) for a brush roller, said drum (2) being built up of at least two segments (7.1, ..., 7.4), each of which is provided at its upper side (8) with two or more, preferably four, protruding beams (9.1, ..., 9.4), a U-shaped channel (10.2) being arranged between two adjacent beams (9.1, 9.2), and the drum (2) being arranged to rotate about its axis (12) by means of torque-transmitting means (50) connected to the drum (2), each segment (7.1, ..., 7.4) in the drum (2) being constructed with double walls with a rigidity sufficient for the assembled segments (7.1, ..., 7.4) to form a fully self-supporting drum (2). The invention also relates to an axle (1) for a brush roller, the axle (1) consisting of a drum (2) as described above, which is arranged between two shaft ends (3, 4), each shaft end (3, 5) being connected to a torque-transmitting plate (50) arranged concentrically in relation to and connected to the end part (22) of the drum (2).

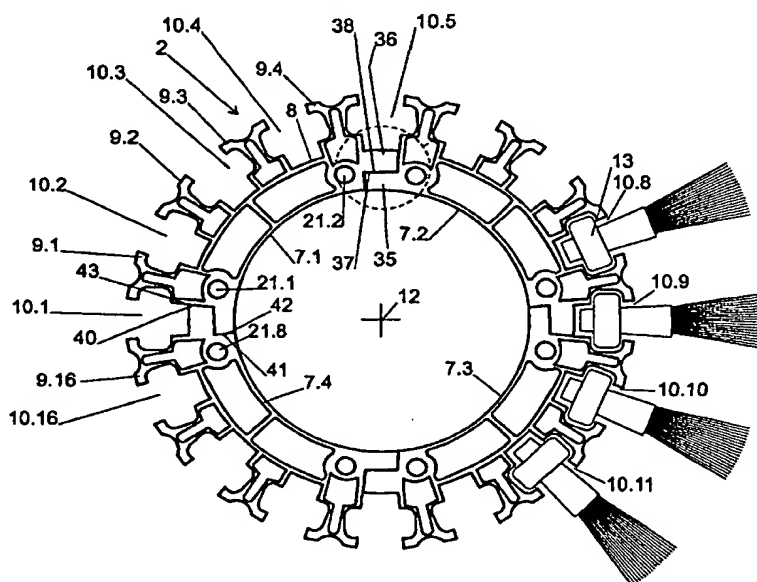

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR MOUNTING A DRUM AS WELL AS A DRUM AND AN AXLE FOR A BRUSH ROLLER

Technical field

5 The invention relates to a drum as axle in a brush roller. Brush rollers are used for cleaning large flat surfaces and also in industrial context for deburring, polishing or roughening surfaces or edges.

Background art

10 It is well known that axles for brush rollers, particularly brush rollers used in road cleaning machines, are difficult to manufacture. These brushes generally have a length of between 1.5 to 4 meter and a diameter of between 700 and 1800 mm. The brushes rotate at a speed of between 400 and 1000 r/m.

15 The traditional method of manufacturing the axle of a brush roller is to attach axial holders on a steel pipe or rod, at the periphery of the pipe. Various types of brush magazines are then fitted in these holders. These axial holders are generally made of extruded aluminium. Other components included in such a brush roller are various forms of key joints and spacers. The steel pipe and spacers are welded together with known precision. A large number of holes for attachment bolts must also be drilled and threaded in the steel pipe. This vast number of components entails high storage costs for material as well as expensive machining costs.

25 Commercial alternatives available are to design the axle of the brush roller as a fully extruded aluminium section. One problem is that the die used for the extrusion is limited as to size so that only certain maximum diameters can be produced. Furthermore, these extruded aluminium sections are extremely heavy since the material is thick, and it is impossible to reduce their mass by inserting cavities. A considerable drawback when extruding aluminium sections is the banana shape the section acquires on the cooling bed. A section that is 4 meter in length may have a curvature of 4 mm or more. This curvature entails extra work at the dynamic balancing.

35 It is also known through US 3,134,123 and US 3,862,463 to make the cylindrical axle of the brush roller in segments, which are joined together and anchored, to hub members situated centrally at the ends of the axle. The segments are in the form of thin-walled sections, which are not reinforced in axial direction, and the axle is therefore limited in both length and diameter. This method of constructing the axle of a brush roller does not permit the manufacture of long axles, e.g. 4 m, nor axles having large diameter, e.g. 1200 mm, because of the unbalance occurring at the revolution speeds involved. US 3,134,123 also indicates

that the embodiment shown in figure 3 constitutes a self-supporting construction. However, this construction is extremely expensive since the dovetail joints of the sections cannot be manufactured without after-working, with the tolerances necessary if the joints are to be free from play. Furthermore, the dovetail form according to US 3,134,123 must have a certain play to enable one section to be axially inserted into another section, and this per se results in play in the construction.

Object of the invention

The object of the invention is to solve the problems mentioned above and to improve a drum in the axle of a brush roller so that the axle becomes simpler and less expensive to manufacture, as well as being lighter, which contributes to increased stability at the bearing housings of the axle.

Another object of the invention is to provide a drum for the axle of a brush roller which drum, under dynamic loading, behaves as a rigid cylinder.

A further object of the invention is to provide a drum for a brush roller with relatively large diameter and length, which can be produced from extruded aluminium sections and which, after assembly, performs entirely free from play and with a rigidity equivalent to a homogenous body, e.g. a cylinder.

Summary of the invention

The objects stated above are achieved and the drawbacks eliminated by means of the present invention as defined in the claims.

The method for assembling a drum according to the inventive concept is that the drum forms a part of an axle and that the axle constitutes a part of a brush roller. Characteristic of the assembly is that an axle consists of a drum on which an end plate with two shaft ends have been mounted.

The drum preferably has circular cross section. A plurality of axial, preferably U-shaped channels are arranged at the periphery of the drum. A normal axle has 16 channels but the number of channels may be either more or fewer.

The drum is preferably made from four segments of extrude aluminium sections.

The number of segments is in no way limited to these four segments but may vary from two or more, e.g. 2, 4, 6 or 8. An even number of sections is preferable in order to achieve dynamic balance in the simplest manner at rotation.

The segments exhibit an outer arc shape. Four segments, for instance, are fitted together to form a drum. Each segment has a first edge part with a first shoulder and a second edge part with a second shoulder.

Assembly of four segment sections to a drum is as follows:

In a first step each segment is arranged so that the edge portion of the first shoulder and/or the edge portion of the second shoulder are in contact with

the second or first contact surface, respectively, of an adjacent segment. This ensures that the drum will always have the same diameter. A space between the various segments may cause unbalance. The contact surfaces between the shoulders of the segments are flat so as to obtain the greatest possible contact area without having to machine the surfaces. Alternatively the contact surfaces of the shoulders may be provided with pins and recesses in order to a greater extent to take up tangential shear stress between the segments.

A variant of the shape of the segments is to arrange two adjacent segments with the lower side of the second shoulder of a first segment in contact with the upper side of the first shoulder of a second segment.

This is done when the shoulders of the segments are at different levels, i.e. radial distance from the axis of rotation of the axle. An alternative embodiment is the use of two differently shaped segments, alternate segments being identical, i.e. the shoulders on alternate segments are at equal radial distance from the inner arc.

Another factor is that each section is curved at the extrusion. By dividing the drum into segments, the curvature of the segments will be compensated and the drum becomes straight. At one and the same extrusion process each rod will be cooled in the same way and each will acquire similar defects.

A second step entails drilling or drilling and threading through-holes in radial direction, e.g. through the first, outermost shoulder as a clearance hole and through the second, innermost shoulder as a threaded hole, in each segment. Two or more holes are drilled along the segments in each shoulder, at equal or different distances from each other.

The third step entails passing an attachment element, a bolt or a screw and nut, through each hole. This screw joint ensures complete freedom from play, which is necessary if a brush roller 2.5 - 6.0 meter in length is to be balanced dynamically and then withstand a continuous speed of revolution of up to 1200 rpm.

When the drum is mounted on the axle, a circular plate with a concentrically arranged shaft end is fitted on the end portions of the drum. Congruence exists between every or every other segment incorporated in a drum. The advantage of having only one shape for the segments in the drum is to save costs.

The segments incorporated in a drum exhibit the following characteristics:

- the segments consist of extruded aluminium sections;
- a segment exhibits an outer arc form;
- each aluminium section is provided on its upper side with two or more, preferably four, radially protruding beams;
- a U-shaped channel is formed between two adjacent beams;
- each segment has a first shoulder and a second shoulder.

In one embodiment the upper side of the first shoulder and the lower side of the second shoulder of a segment preferably have flat surfaces.

The segments are also made double-walled, one or more cavities being formed in each segment. In a segment with two cavities, these cavities are separated by radially reinforced spacers extending axially along the entire length of the segment. The U-shaped channels of the segment are also situated radially in relation to the imagined central axis of the drum.

Brief description of the drawings

One embodiment of the invention is shown schematically in the accompanying drawings in which

- Figure 1 shows an axle with its drum and two shaft ends,
- Figure 2 shows an end part of a drum including a number of brush magazines inserted into slots,
- Figure 3 shows an embodiment of a brush magazine
- Figures 4 A-B show a segment
- Figure 5 shows a section from figure 3 through a join between two segments revealing hole and bolt.
- Figure 6 shows a view A-A in figure 1 of an end part of the axle of a brush roller.

Description of the invention

Figure 1 illustrates an axle 1 seen from the front, built up of a drum 2 and two shaft ends 3, 4. Each shaft end 3, 4, possibly in the form of part of a spline joint, is mounted on a torque transmitting plate 50 which in turn covers the end part 22 of the drum 2. Two shaft ends 3, 4, each with a plate 50, together with a drum 2, constitute the axle 1 of a brush roller.

Figure 2 shows an end part of the drum 2, the drum 2 in this embodiment comprising four segments 7.1, 7.2, 7.3, 7.4. The drum 2 is formed by the four segments 7.1, 7.2, 7.3, 7.4 after assembly. The segments 7.1, 7.2, 7.3, 7.4 are produced from an extruded aluminium section. Each segment 7.1, 7.2, 7.3, 7.4 is provided on its upper side 8 with four radially protruding beams 9.1, 9.2, 9.3, 9.4. In order to reduce manufacturing costs, the segments 7.1, 7.2, 7.3, 7.4 are congruent with each other.

In a drum 2 assembled from four segments 7.1, 7.2, 7.3, 7.4 there are sixteen U-shaped channels 10.1 10.16, arranged so that a U-shaped channel 10.2 is produced between two adjacent beams 9.1, 9.2. Similarly, the channels 10.1, ... 10.16 are arranged between the adjacent beams 9.1, ...9.16. Rows of brush magazines 13 in which brushes are fitted, are shown in the U-shaped

channels 10.8 ... 10.11. Eight circular, threaded holes 21.1, ... 21.8 intended for use when assembling the plate 50 with its shaft ends 3, 4 to the end part 22 of the drum 2 are also arranged axially in each segment, preferably in the area below a beam near the ends of the segment. The drum is arranged to rotate about its central axis 12.

Figure 3 shows an embodiment of a brush magazine 13 comprising a holder 14 for five brushes with card wire 15, pressed into a plastic holder 16.

Figures 4A and 4B show an individual segment 7.1 with its extruded aluminium section, seen from the end. When an aluminium section 7 is extruded through a die, all the holes in the die will give the aluminium section 7 an elongate shape. The pattern of holes in a die corresponds with the cross section of the section. In order to reduce the cost at manufacture, as well as the weight, and to increase the rigidity of the section 7, the section is provided with a number of cavities 20.1 - 20.6, four of which are situated in the beams 9.1, ... 9.4, and two in the section 7. The two cavities 20.2, 20.4 in the section are formed by the section having double walls and the cavities being separated by radially reinforced spacers 60 extending axially along the entire length of the segment. In this example there are two more holes - the two circular, threaded holes 21.1, 21.2 intended for use when assembling the plate 50 with its shaft ends 3, 4 to the end part 22 of the drum 2, see figure 1. Each beam 9.1 ... 9.4 in the segment 7.1 exhibits a first side part 25.1 and a second side part 25.2, each with a longitudinal slot 26.1, 26.2. Each slot 26.1, 26.2 in each beam 9.1, ... 9.4, is at the same distance from the central point 12 of the drum. The openings of the slots 26.1, 26.2 face the U-shaped channel 10.1 ... 10.16. The openings 11 of the U-shaped channels 10.1 ... 10.16 face away from the centre 12 of the drum 2.

The outwardly facing surfaces 27.1 ... 27.16 of the beams 9.1, 9.2 when the segments 7.1 ... 7.4 are assembled to a drum 2, are at a tangent to a circumscribed circle 28. Each segment 7.1, 7.2, 7.3, 7.4 has an outer arc shape 28A. One segment 7.1 in this example shows an inwardly facing surface 29 which also has an arc shape. Both the circumscribed circle 28 and the inwardly facing arc-shaped surface 29 have the same radial centre 12. A first shoulder 35 is arranged on the section 7, tangentially outside the first beam 9.1, and a second shoulder 36 is arranged on the section tangentially outside the fourth beam 9.4. The surfaces of the upper side 37 of the first shoulder 35 and the lower side 38 of the second shoulder 36 are preferably flat but may also assume an arc shape with a common radius 39. The centre of the radius 39 is at the centre 12 of the drum. The width "b1 - b2", i.e. the distance from the inner corner b2 between the upper side 37 of the shoulder 35 and a first radial contact surface 40 on the first beam 9.1 to the outer corner b1 of the shoulder 35 is preferably equal to the width "b3-b4", i.e. the

distance from the inner corner b3 between the lower side 38 of the second shoulder and a second radial contact surface 41 below the fourth beam 9.4 to the outer corner b4 of the shoulder 36.

The outside of the preferably upwardly directed part at the upper side 37 of the first shoulder 35 is thus designated a first contact surface 40. The outside of a preferably radially downwardly directed part at the lower side 38 of the shoulder 36 is corresponding designated a second contact surface 41.

The first shoulder 35 is provided with a first edge part 42. This edge part 42 extends from the lower side 29 of the shoulder 35 to its upper side 37. The second shoulder 36 is provided with a second edge part 43 extending from the lower side 38 of the shoulder 36 to the upper side 44 of the shoulder 36.

Assembly of the drum 2 is performed as follows:

- a) four segments 7.1, 7.2, 7.3, 7.4, figures 4A, 4B, are arranged close to each other as shown in figure 2 in such a way that the upper side 37 of the first shoulder 35 of a segment 7.1, 7.2, 7.3, 7.4 is brought into contact with the lower side 38 of a second shoulder 36;
- b) the first shoulder 35 of each segment 7.1, 7.2, 7.3, 7.4 and its first edge part 42 are brought into contact with the second contact surface of adjacent segments 7.1, 7.2, 7.3, 7.4, see figure 2;
- c) the second shoulder 36 of each segment 7.1, 7.2, 7.3, 7.4 and its second edge part 43 are brought into contact with the first contact surface 40 of adjacent segments, see figure 2;
- d) an alternative to b) and c) is for either a first edge part 42 to be in contact with a second contact surface 41 or a second edge part 43 to be in contact with a first contact surface 40;
- e) holes 45, 46 are drilled and threaded in radial direction, figures 4A, 4B, through each first 35 and second shoulder 36.
- f) a plurality of holes 45, 46 are drilled at equal or different axial distance from each other;
- g) an attachment element 47, figure 5, bolt, is arranged through each hole 45, 46 in such a manner that a friction joint is obtained between the shoulders 35, 36 at the contact surface 37, 38.

Figure 5 shows a section through a joint in figure 2 between two adjacent segments 7.1, 7.2. The section shows that the segments have been assembled using a screw joint, the second shoulder 36 of one segment 7.1 having a through-hole radially aligned with a threaded hole through the first shoulder 35 of the second segment 7.2. An attachment 47 in the form of a bolt, i.e. a machine screw, is screwed through these holes. The flat contact surfaces 37, 38 are thus pressed against each other, see figure 2. The upper side 44 of the shoulder 36 is also flat

in order to provide the best possible contact surface for the attachment element 47.

Figure 6 shows a view A-A in figure 1 with part of the plate 50 removed. The figure shows the end of the axle 1 with its shaft end 3 arranged concentrically with the plate 50. Holes 52.n are arranged at the periphery 51 of the plate 50, where $n=1, \dots, 8$, for a second attachment element 53 in the form of an axially fitted bolt. The distance between the holes 52.1 ... 52.8 corresponds to the distance between the threaded holes 21.n, where $n=1, \dots, 8$, at the end part 22 of the drum 2.

Assembly of the plates 50 with their shaft ends 3, 4 to the drum 2 is performed as follows:

- a) a shaft end 3, 4 and its torque-transmitting plate 50 is arranged at each end part 22 of the drum 2;
- b) the shaft ends 3, 4 with plate 50 are arranged concentric with the end part 22 of the drum 2;
- c) the attachment element 53 is screwed through the holes 52.1, ... 52.8 in each plate 50 and into the holes 21.1, ... 21.8 in the end part 22 of the drum 2.

The invention is not limited to the example described but can be used in all drums built up of segments to be used as part of an axle where each segment is in the form of an extruded section and where each segment has two shoulders that are united with an attachment element. The invention is not limited to a certain number of segments but applies to all segments amounting to two or more. Neither is the invention in its widest scope limited to the drum assuming the shape of a cylinder. It may also assume the shape of an equilateral polygon.

CLAIMS

1. A method for assembling a drum (2) built up of segments (7.1, ... 7.4) forming part of an axle (1) for a brush roller, **characterized in**

- 5 a) that each segment (7.1, ... 7.4) is brought into alignment by the edge portion (42, 43, respectively) of a first shoulder (35) and/or a second shoulder (36) being brought into contact with the second (41) or first (40) contact surface of an adjacent segment (7.1, ... 7.4);
- 10 b) that through-holes (45, 46) are drilled in radial direction through a first (35) and a second shoulder (36) in each segment (7.1, ... 7.4), one of said holes also being threaded;
- c) that two (45, 46) or more holes (45, 46) are drilled in axial direction in each shoulder at equal or different distances from each other;
- d) that an attachment element (47) is arranged at each hole (45, 46).

15 2. A method as claimed in claim 1, **characterized** in that a plate (50) with a shaft end (3, 4) is arranged at each end (22) of the drum (2).

20 3. A drum (2) for a brush roller, said drum (2) being built up of at least two segments (7.1, ... 7.4), each of which is provided at its upper side (8) with two or more, preferably four, protruding beams (9.1, ... 9.4), a U-shaped channel (10.2) being arranged between two adjacent beams (9.1, 9.2), and the drum (2) being arranged to rotate about its axis (12) by means of torque-transmitting means (50) connected to the drum (2), **characterized** in that each segment (7.1, ... 7.4) in the

25 drum (2) is constructed with double walls with a rigidity sufficient for the assembled segments (7.1, ... 7.4) to form a fully self-supporting drum (2).

30 4. A drum as claimed in claim 3, **characterized** in that each segment (7.1, ... 7.4) is constructed with reinforcing spacers (60) between the double walls.

5. A drum as claimed in any one of claims 3-4, **characterized** in that congruence exists between at least two of the segments (7.1, ... 7.4) comprising the drum (2).

35 6. A drum as claimed in any one of claims 3-5, **characterized** in that the segments (7.1, ... 7.4) define an outer arc shape (28A).

7. A drum as claimed in any one of claims 3-6, **characterized** in that each segment (7.1, ... 7.4), in cross section, shows a first edge part (42) with a first

shoulder (35) and a second edge part (43) with a second shoulder (36), the upper side (37) of the first shoulder (35) and the lower side (38) of the second shoulder (36) exhibiting a flat surface.

5 8. A drum as claimed in claim 7, **characterized** in that between two adjacent segments (7.1, 7.2), the flat surface of the lower side (38) of the second shoulder (36) of a first segment (7.1) is in contact with the flat surface of the upper side (37) of the first shoulder (35) of a second segment (7.2).






10 9. A drum as claimed in any one of claims 3-8, **characterized** in that the segments (7.1, ... 7.4) consist of extruded aluminium sections (7.1, ... 7.4).

15 10. A drum as claimed in any one of claims 3-9, **characterized** in that the number of segments (7.1, ... 7.4) in the drum (2) is an even number, e.g. 2, 4, 6 or 8.



20 11. A drum as claimed in any one of claims 3-10, **characterized** in that the drum (2) per se consists of two or more, preferably four longish segments (7.1, ... 7.4), of identical length, of extruded sections (7.1, ... 7.4), each segment (7.1, ... 7.4) exhibiting an outer arc form (28A).

25 12. An axle (1) for a brush roller, **characterized** in that the axle (1) consists of a drum (2) as claimed in any one of claims 3-11, which is arranged between two shaft ends (3, 4), each shaft end (3, 4) being connected to a torque-transmitting plate (50) arranged concentrically in relation to and connected to the end part (22) of the drum (2).

1/2

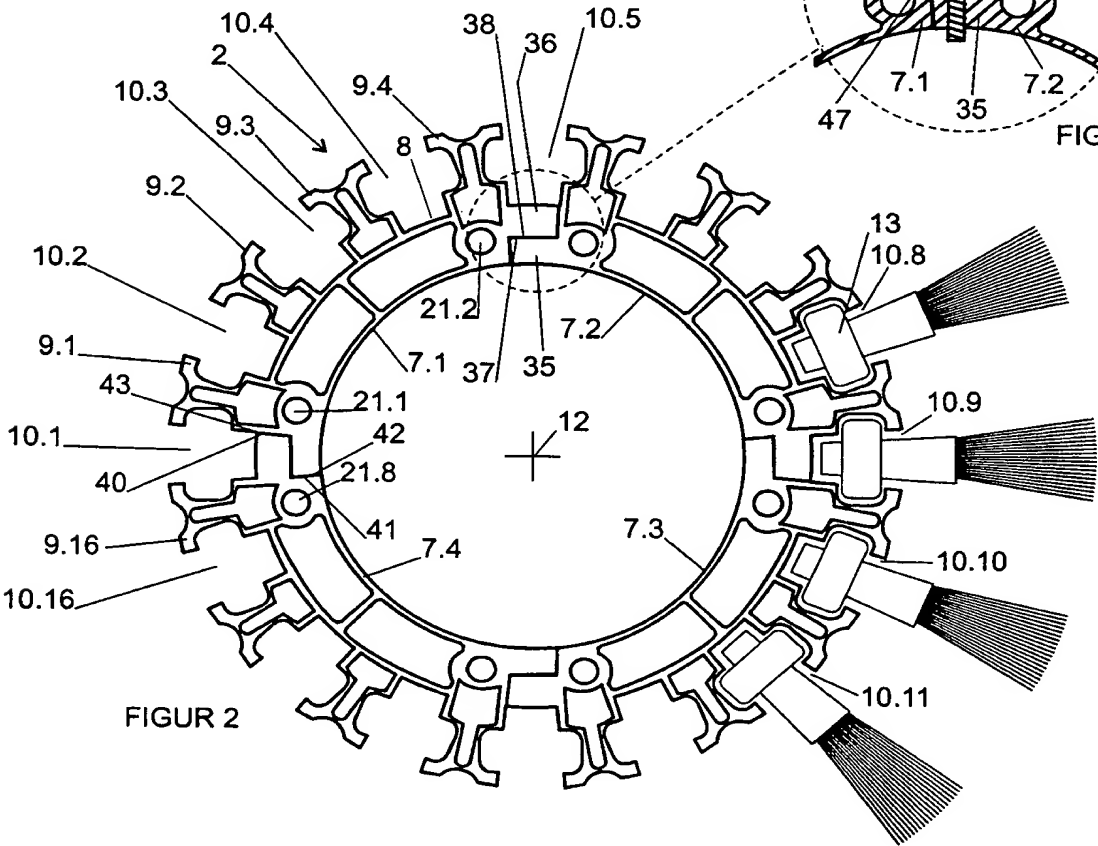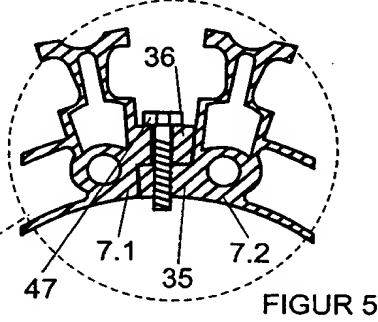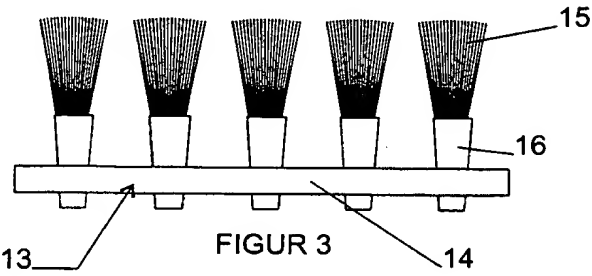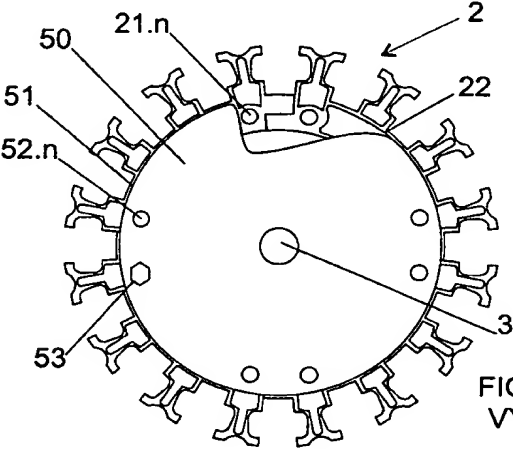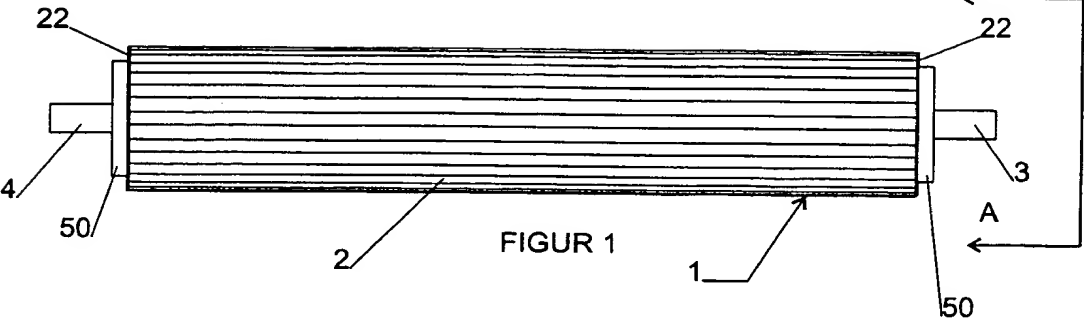

2/2

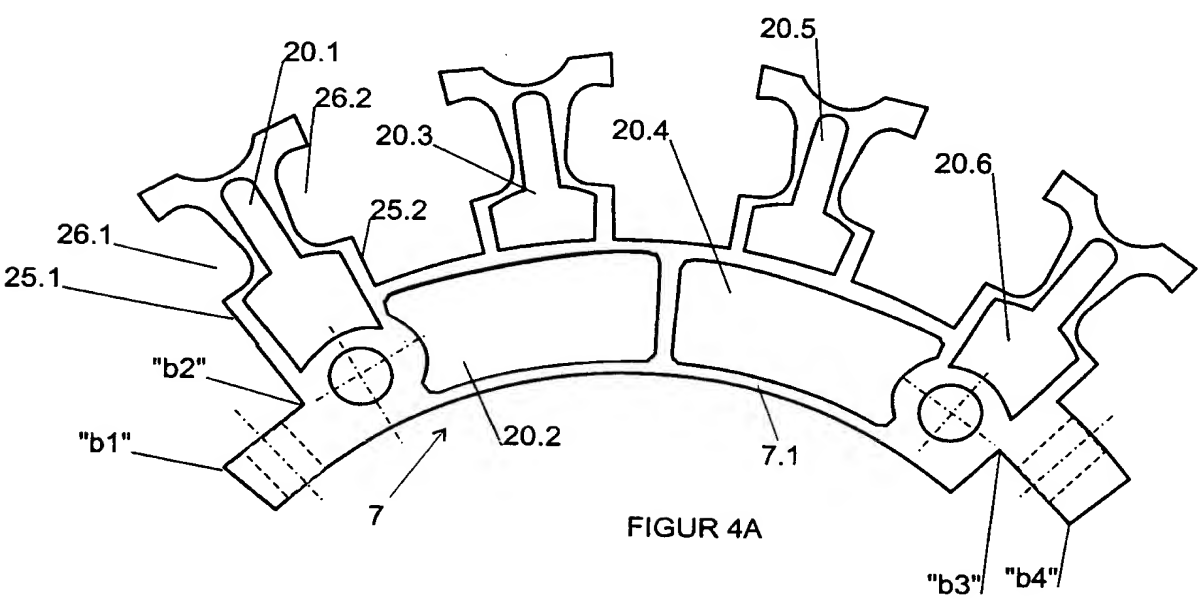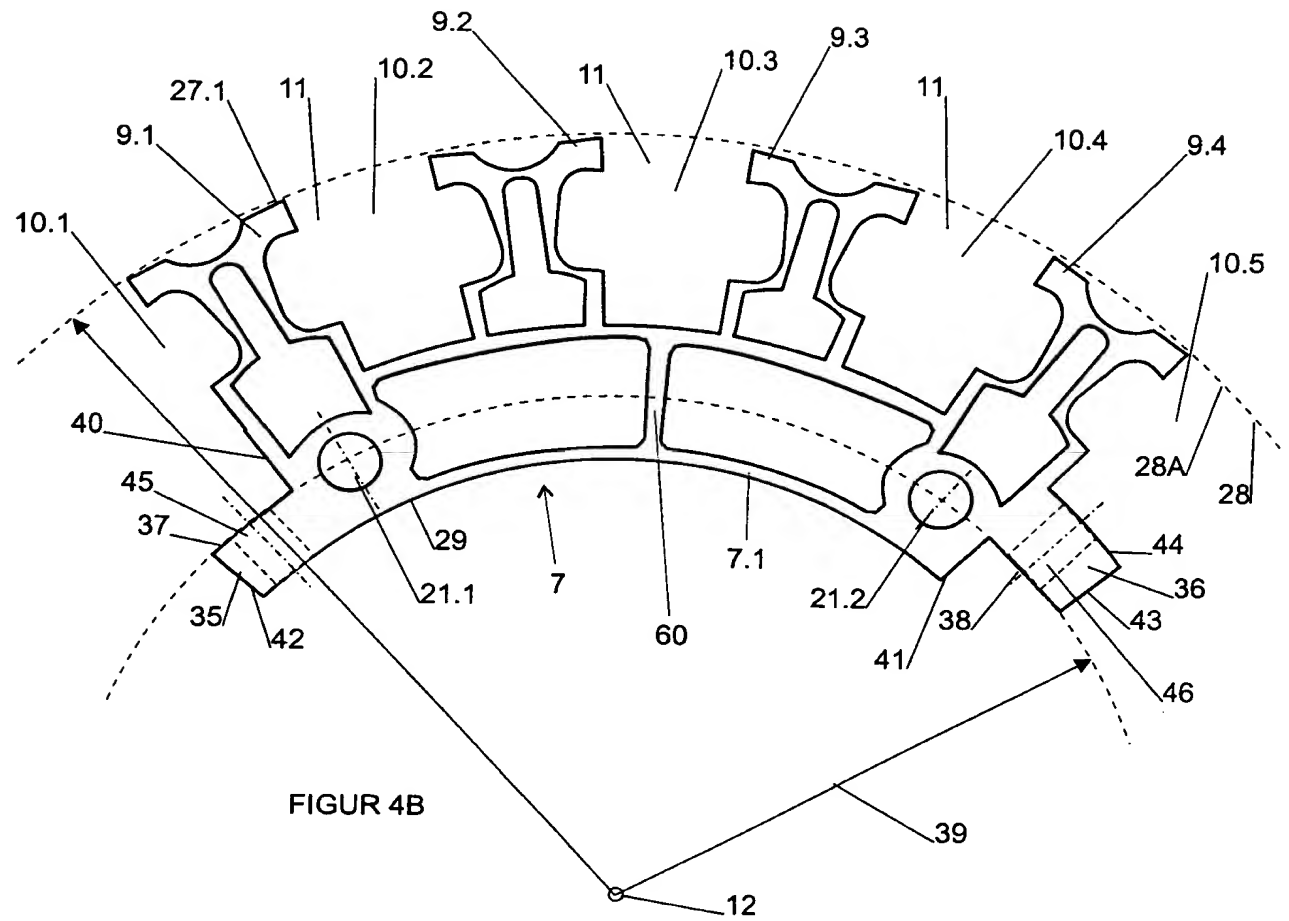

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/00416

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A46B 7/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A46B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3134123 A (B.E. NELSON), 26 May 1964 (26.05.64) --	1-12
A	US 3533125 A (J.A. BUECHEL ET AL), 13 October 1970 (13.10.70) --	1-12
A	US 3862463 A (R.C. REITER), 28 January 1975 (28.01.75) -- -----	1-12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 June 2000

Date of mailing of the international search report

06-07-2000

Name and mailing address of the ISA:

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Åke Olofsson / MRo

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/SE 00/00416

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	3134123	A	26/05/64	NONE	
US	3533125	A	13/10/70	NONE	
US	3862463	A	28/01/75	NONE	